

RNA-seq analysis in R

Initial exploration of RNA-seq data

Contents

Introduction	1
Data import	2
A brief description of the data set	2
Reading in the sample metadata	2
Reading in the count data	2
Create a raw counts matrix for data exploration	4
Filtering the genes	4
Data transformations and visualization	5
Principal Component Analysis	11
References	15

Introduction

In this section we will begin the process of analyzing the RNAseq data in R. In the next section we will use DESeq2 for differential analysis. A detailed analysis workflow, recommended by the authors of DESeq2 can be found on the Bioconductor website.

Before embarking on the main analysis of the data, it is essential to do some exploration of the raw data. We want to assess the patterns and characteristics of the data and compare these to what we expect from mRNAseq data and assess the data based on our knowledge of the experimental design. The primary means of data explorations are summary statistics and visualisations. In this session we will primarily concentrate on assessing if the patterns in the raw data conform to what we know about the experimental design. This is essential to identify problems such as batch effects, outlier samples and sample swaps.

Due to time constraints we are not able to cover all the ways we might do this, so additional information on initial data exploration are available in the supplementary materials.

In this session we will:

- import our counts into R
- filter out unwanted genes
- look at the effects of variance and how to mitigate this with data transformation
- do some initial exploration of the raw count data using principle component analysis

Data import

First, let's load all the packages we will need to analyse the data.

```
library(tximport)
library(DESeq2)
library(tidyverse)
```

A brief description of the data set

The data for this tutorial comes from the paper Transcriptomic Profiling of Mouse Brain During Acute and Chronic Infections by *Toxoplasma gondii* Oocysts (Hu et al. 2020). The raw data (sequence reads) can be downloaded from the NCBI Short Read Archive under project number **PRJNA483261**.

Please see extended material for instructions on downloading raw files from SRA.

This study examines changes in the gene expression profile in mouse brain in response to infection with the protozoan *Toxoplasma gondii*. The authors performed transcriptome analysis on samples from infected and uninfected mice at two time points, 11 days post infection and 33 days post infection. For each sample group there are 3 biological replicates. This effectively makes this a two factor study with two groups in each factor:

- Status: Infected/Uninfected
- Time Point: 11 dpi/33 dpi

Reading in the sample metadata

The `SampleInfo.txt` file contains basic information about the samples that we will need for the analysis today: name, cell type, status.

```
# Read the sample information into a data frame
sampleinfo <- read_tsv("data/samplesheet.tsv", col_types = c("cccc"))
sampleinfo %>%
  arrange(Status, TimePoint, Replicate)
```

```
## # A tibble: 12 x 4
##   SampleName Replicate Status      TimePoint
##   <chr>      <chr>    <chr>    <chr>
## 1 SRR7657878 1         Infected d11
## 2 SRR7657881 2         Infected d11
## 3 SRR7657880 3         Infected d11
## 4 SRR7657874 1         Infected d33
## 5 SRR7657882 2         Infected d33
## 6 SRR7657872 3         Infected d33
## 7 SRR7657877 1         Uninfected d11
## 8 SRR7657876 2         Uninfected d11
## 9 SRR7657879 3         Uninfected d11
## 10 SRR7657883 1         Uninfected d33
## 11 SRR7657873 2         Uninfected d33
## 12 SRR7657875 3         Uninfected d33
```

Reading in the count data

Salmon (Patro 2017) was used to quantify gene expression from raw reads against the Ensembl transcriptome GRCm38 version 102 (as described in the previous session).

First we need to read the data into R from the `quant.sf` files under the `salmon` directory. To do this we use the `tximport` function. We need to create a named vector in which the values are the paths to the `quant.sf` files and the names are sample names that we want in the column headers - these should match the sample names in our `sampleinfo` table.

The Salmon quantification results are per transcript, we'll want to summarise to gene level. To this we need a table that relates transcript IDs to gene IDs.

```
files <- str_c("salmon/", sampleinfo$SampleName, "/quant.sf")
files <- set_names(files, sampleinfo$SampleName)

tx2gene <- read_tsv("references/tx2gene.tsv")
```

```
##
## -- Column specification -----
## cols(
##   TxID = col_character(),
##   GeneID = col_character()
## )
txi <- tximport(files, type = "salmon", tx2gene = tx2gene)
```

```
## reading in files with read_tsv
## 1 2 3 4 5 6 7 8 9 10 11 12
## summarizing abundance
## summarizing counts
## summarizing length
```

```
str(txi)
```

```
## List of 4
## $ abundance      : num [1:35896, 1:12] 20.381 0 1.966 1.059 0.949 ...
## ..- attr(*, "dimnames")=List of 2
## .. ..$ : chr [1:35896] "ENSMUSG00000000001" "ENSMUSG00000000003" "ENSMUSG00000000028" "ENSMUSG00000000037" ...
## .. ..$ : chr [1:12] "SRR7657878" "SRR7657881" "SRR7657880" "SRR7657874" ...
## $ counts         : num [1:35896, 1:12] 1039 0 65 39 8 ...
## ..- attr(*, "dimnames")=List of 2
## .. ..$ : chr [1:35896] "ENSMUSG00000000001" "ENSMUSG00000000003" "ENSMUSG00000000028" "ENSMUSG00000000037" ...
## .. ..$ : chr [1:12] "SRR7657878" "SRR7657881" "SRR7657880" "SRR7657874" ...
## $ length         : num [1:35896, 1:12] 2905 541 1884 2100 480 ...
## ..- attr(*, "dimnames")=List of 2
## .. ..$ : chr [1:35896] "ENSMUSG00000000001" "ENSMUSG00000000003" "ENSMUSG00000000028" "ENSMUSG00000000037" ...
## .. ..$ : chr [1:12] "SRR7657878" "SRR7657881" "SRR7657880" "SRR7657874" ...
## $ countsFromAbundance: chr "no"
```

```
head(txi$counts)
```

	SRR7657878	SRR7657881	SRR7657880	SRR7657874	SRR7657882
ENSMUSG00000000001	1039.000	1005.888	892.000	917.360	1136.691
ENSMUSG00000000003	0.000	0.000	0.000	0.000	0.000
ENSMUSG00000000028	65.000	74.000	72.000	44.000	45.999
ENSMUSG00000000037	39.000	47.000	29.001	54.001	67.000
ENSMUSG00000000049	8.000	9.000	4.000	4.000	4.000
ENSMUSG00000000056	2163.468	2067.819	2006.924	1351.675	2367.801
	SRR7657872	SRR7657877	SRR7657876	SRR7657879	SRR7657883
ENSMUSG00000000001	1259.000	1351.221	1110.999	1067.634	1134.522
ENSMUSG00000000003	0.000	0.000	0.000	0.000	0.000

```
## ENSMUSG00000000028      60.000      35.000      52.000      55.999      58.000
## ENSMUSG00000000037      62.000      69.000      35.000      60.000      21.001
## ENSMUSG00000000049       9.001       6.000      10.000       4.000       8.000
## ENSMUSG00000000056    1412.733    2154.230    2121.740    1962.000    2274.701
##                               SRR7657873 SRR7657875
## ENSMUSG00000000001     1272.003     1065.000
## ENSMUSG00000000003       0.000       0.000
## ENSMUSG00000000028      75.000      54.000
## ENSMUSG00000000037      50.000      28.000
## ENSMUSG00000000049       6.000       9.000
## ENSMUSG00000000056    1693.000    2260.046
```

Save the `txi` object for use in later sessions.

```
saveRDS(txi, file = "salmon_outputs/txi.rds")
```

A quick intro to dplyr

One of the most complex aspects of learning to work with data in R is getting to grips with subsetting and manipulating data tables. The package `dplyr` (Wickham et al. 2018) was developed to make this process more intuitive than it is using standard base R processes. It also makes use of a new symbol `%>`, called the “pipe,” which makes the code a bit tidier.

In particular we will use the commands:

- `select` to select columns from a table
- `filter` to filter rows based on the contents of a column in the table
- `rename` to rename columns

We will encounter a few more `dplyr` commands during the course, we will explain their use as we come to them.

If you are familiar with R but not `dplyr` or `tidyverse` then we have a very brief introduction here. A more detailed introduction can be found in our online R course

Create a raw counts matrix for data exploration

DESeq2 will use the `txi` object directly but we will need a counts matrix to do the data exploration.

```
rawCounts <- round(txi$counts, 0)
```

Filtering the genes

For many analysis methods it is advisable to filter out as many genes as possible before the analysis to decrease the impact of multiple testing correction on false discovery rates. This is normally done by filtering out genes with low numbers of reads and thus likely to be uninformative.

With DESeq2 this is however not necessary as it applies **independent filtering** during the analysis. On the other hand, some filtering for genes that are very lowly expressed does reduce the size of the data matrix, meaning that less memory is required and processing steps are carried out faster. Furthermore, for the purposes of visualization it is important to remove the genes that are not expressed in order to avoid them dominating the patterns that we observe.

We will keep all genes where the total number of reads across all samples is greater than 5.

```

# check dimension of count matrix
dim(rowCounts)

## [1] 35896    12

# for each gene, compute total count and compare to threshold
# keeping outcome in vector of 'logicals' (ie TRUE or FALSE, or NA)
keep <- rowSums(rowCounts) > 5
# summary of test outcome: number of genes in each class:
table(keep, useNA="always")

## keep
## FALSE TRUE <NA>
## 15805 20091    0

# subset genes where test was TRUE
filtCounts <- rowCounts[keep,]
# check dimension of new count matrix
dim(filtCounts)

## [1] 20091    12

```

Data transformations and visualization

Differential expression calculations with DESeq2 uses raw read counts as input, but for visualization purposes we use transformed counts.

Raw counts

Why not raw counts? Two issues:

- Raw counts range is very large
- Variance increases with mean gene expression, this has impact on assessing the relationships.

```
summary(filtCounts)
```

```
##      SRR7657878      SRR7657881      SRR7657880      SRR7657874
## Min.   :    0   Min.   :    0   Min.   :    0   Min.   :    0
## 1st Qu.:   14   1st Qu.:   17   1st Qu.:   15   1st Qu.:   22
## Median :   327  Median :   351  Median :   333  Median :   346
## Mean   :  1387  Mean   :  1346  Mean   :  1330  Mean   :  1200
## 3rd Qu.:  1305  3rd Qu.:  1297  3rd Qu.:  1268  3rd Qu.:  1193
## Max.   :652317  Max.   :590722  Max.   :435515  Max.   :444447
##      SRR7657882      SRR7657872      SRR7657877      SRR7657876
## Min.   :    0   Min.   :    0   Min.   :    0   Min.   :    0
## 1st Qu.:   17   1st Qu.:   25   1st Qu.:   15   1st Qu.:   14
## Median :   407  Median :   380  Median :   365  Median :   346
## Mean   :  1696  Mean   :  1286  Mean   :  1536  Mean   :  1441
## 3rd Qu.:  1628  3rd Qu.:  1304  3rd Qu.:  1473  3rd Qu.:  1376
## Max.   :699342  Max.   :418059  Max.   :613857  Max.   :757857
##      SRR7657879      SRR7657883      SRR7657873      SRR7657875
## Min.   :    0   Min.   :    0   Min.   :    0   Min.   :    0
## 1st Qu.:   13   1st Qu.:   12   1st Qu.:   24   1st Qu.:   13
## Median :   329  Median :   316  Median :   396  Median :   348
## Mean   :  1363  Mean   :  1279  Mean   :  1430  Mean   :  1505


```

```
## 3rd Qu.: 1296 3rd Qu.: 1215 3rd Qu.: 1392 3rd Qu.: 1424
## Max. :722647 Max. :652247 Max. :616070 Max. :625798
```

```
# few outliers affect distribution visualization
```

```
boxplot(filtCounts, main='Raw counts', las=2)
```


Raw counts

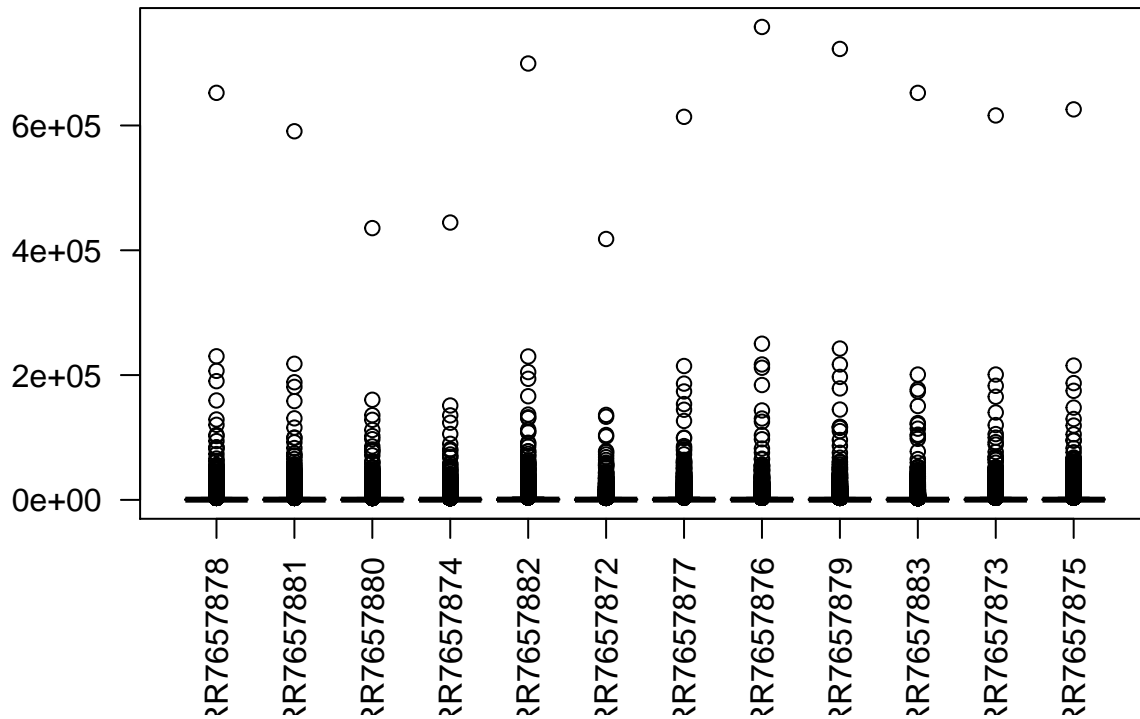

```
# Raw counts mean expression Vs standard Deviation (SD)
```

```
plot(rowMeans(filtCounts), rowSds(filtCounts),
     main='Raw counts: sd vs mean',
     xlim=c(0,10000),
     ylim=c(0,5000))
```

Raw counts: sd vs mean

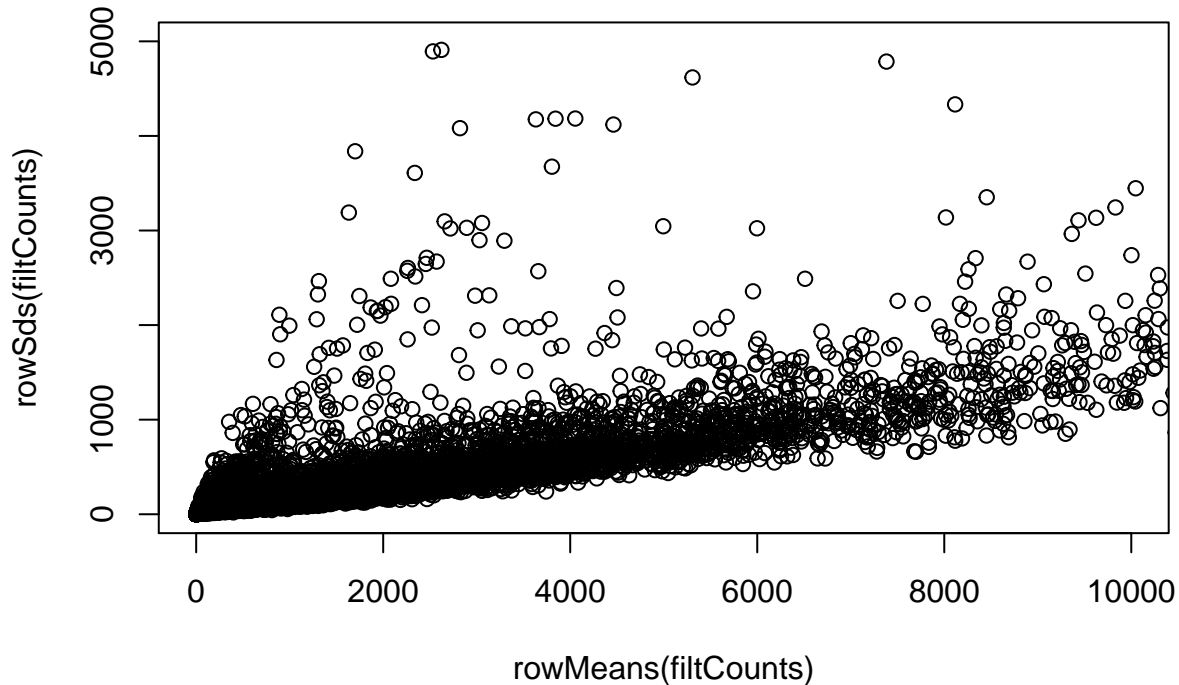

Data transformation

To avoid problems posed by raw counts, they can be transformed. Several transformation methods exist to limit the dependence of variance on mean gene expression:

- Simple log₂ transformation
- VST : variance stabilizing transformation
- rlog : regularized log transformation

log₂ transformation Because some genes are not expressed (detected) in some samples, their count are 0. As $\log_2(0)$ returns $-\infty$ in R which triggers errors by some functions, we add 1 to every count value to create 'pseudocounts.' The lowest value then is 1, or 0 on the log₂ scale ($\log_2(1) = 0$).

```
# Get log2 counts
logcounts <- log2(filtCounts + 1)
# summary(logcounts[,1]) # summary for first column
# summary(logcounts) # summary for each column
```

We will check the distribution of read counts using a boxplot and add some colour to see if there is any difference between sample groups.


```
# make a colour vector
statusCols <- str_replace_all(sampleinfo$Status, c(Infected="red", Uninfected="orange"))

# Check distributions of samples using boxplots
boxplot(logcounts,
        xlab="",
        ylab="Log2(Counts)",
        las=2,
```

```

col=statusCols,
main="Log2(Counts)")
# Let's add a blue horizontal line that corresponds to the median
abline(h=median(logcounts), col="blue")

```

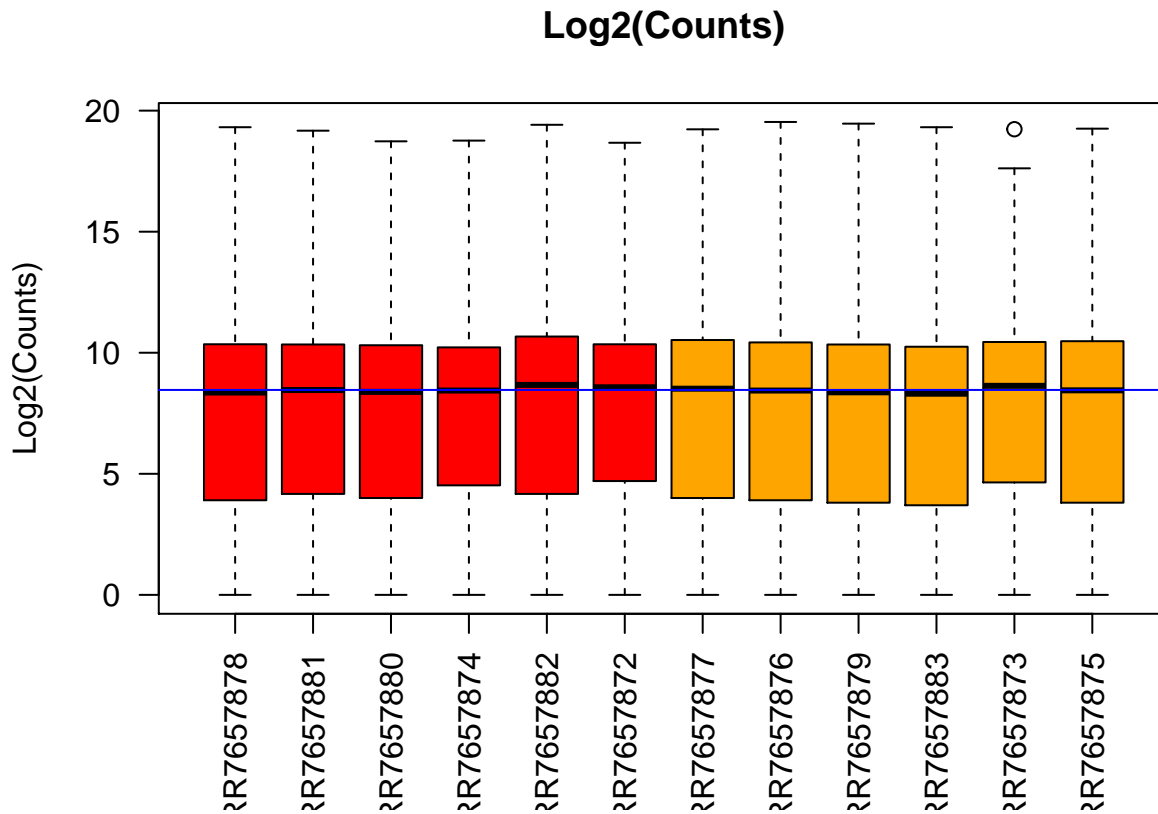


From the boxplots we see that overall the density distributions of raw log-counts are not identical but still not very different. If a sample is really far above or below the blue horizontal line (overall median) we may need to investigate that sample further.

```

# Log2 counts standard deviation (sd) vs mean expression
plot(rowMeans(logcounts), rowSds(logcounts),
main='Log2 Counts: sd vs mean')

```


Log2 Counts: sd vs mean

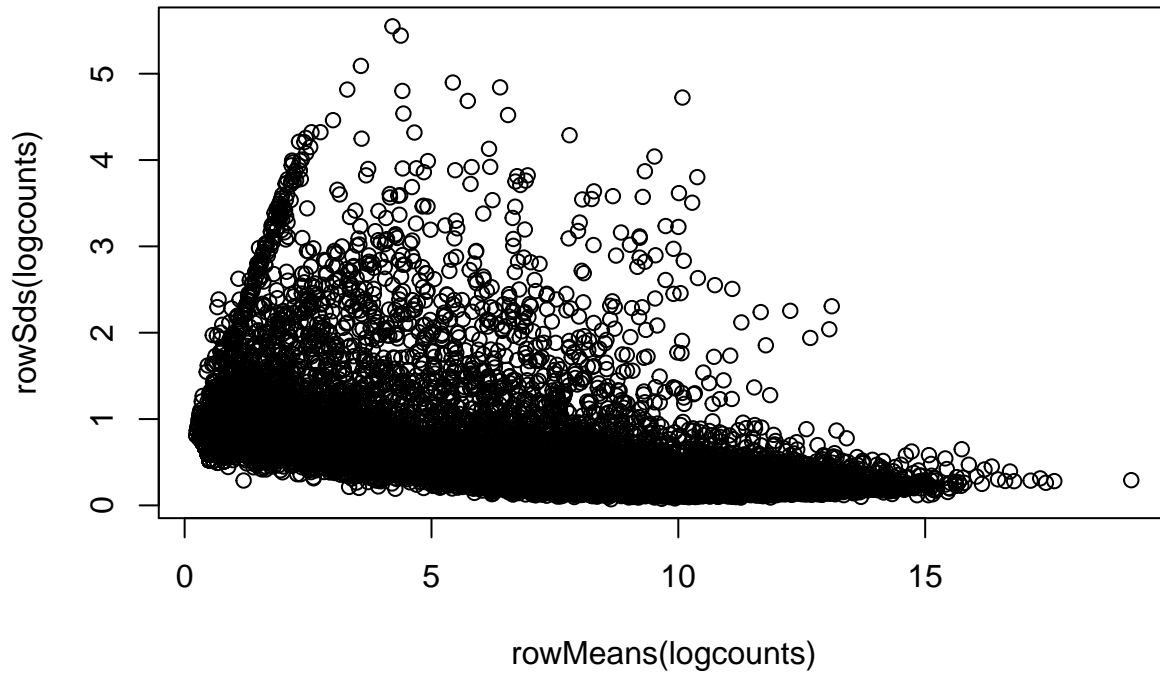

In contrast to raw counts, with log2 transformed counts lowly expressed genes show higher variation.


VST : variance stabilizing transformation Variance stabilizing transformation (VST) aims at generating a matrix of values for which variance is constant across the range of mean values, especially for low mean.

The `vst` function computes the fitted dispersion-mean relation, derives the transformation to apply and accounts for library size.

```
vst_counts <- vst(filtCounts)


# Check distributions of samples using boxplots
boxplot(vst_counts,
        xlab="",
        ylab="VST counts",
        las=2,
        col=statusCols)

# Let's add a blue horizontal line that corresponds to the median
abline(h=median(vst_counts), col="blue")
```

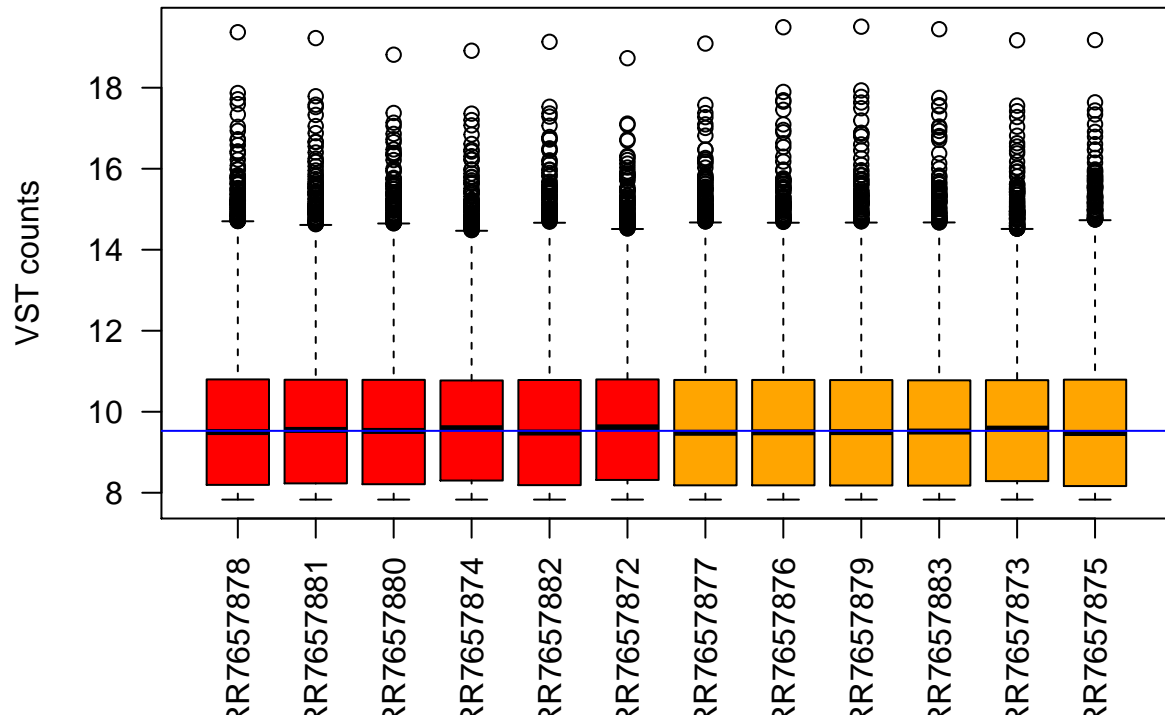

```
# VST counts standard deviation (sd) vs mean expression
plot(rowMeans(vst_counts), rowSds(vst_counts),
     main='VST counts: sd vs mean')
```

VST counts: sd vs mean

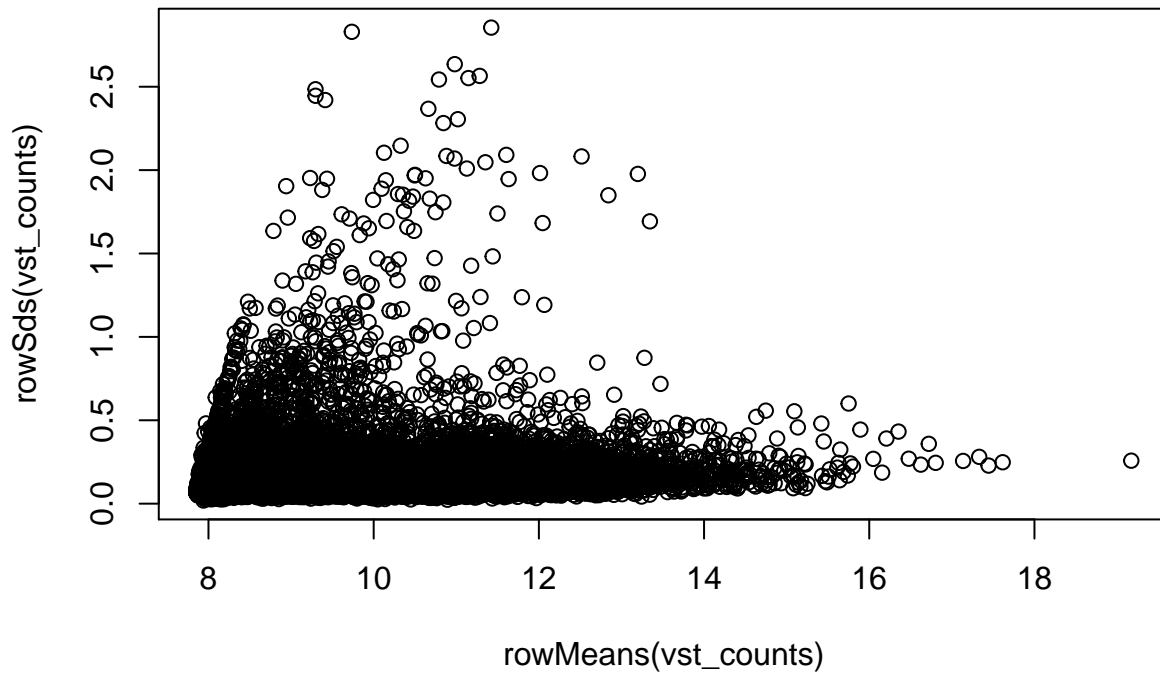

Challenge 1

1. Use the DESeq2 function `rlog` to transform the count data. This function also normalises for library size.
2. Plot the count distribution boxplots with this data
How has this affected the count distributions?

Principal Component Analysis

A principal component analysis (PCA) is an example of an unsupervised analysis, where we don't specify the grouping of the samples. If the experiment is well controlled and has worked well, we should find that replicate samples cluster closely, whilst the greatest sources of variation in the data should be between treatments/sample groups. It is also an incredibly useful tool for checking for outliers and batch effects.

To run the PCA we should first normalise our data for library size and transform to a log scale. DESeq2 provides two separate commands to do this (`vst` and `rlog`). Here we will use the command `rlog`. `rlog` performs a log₂ scale transformation in a way that compensates for differences between samples for genes with low read count and also normalizes between samples for library size.


You can read more about `rlog`, its alternative `vst` and the comparison between the two here.

To plot the PCA results we will use the `autoplot` function from the `ggfortify` package (Tang, Horikoshi, and Li 2016). `ggfortify` is built on top of `ggplot2` and is able to recognise common statistical objects such as PCA results or linear model results and automatically generate summary plot of the results in an appropriate manner.

```
library(ggfortify)


rlogcounts <- rlog(filtCounts)

# run PCA
pcDat <- prcomp(t(rlogcounts))
# plot PCA
autoplot(pcDat)
```

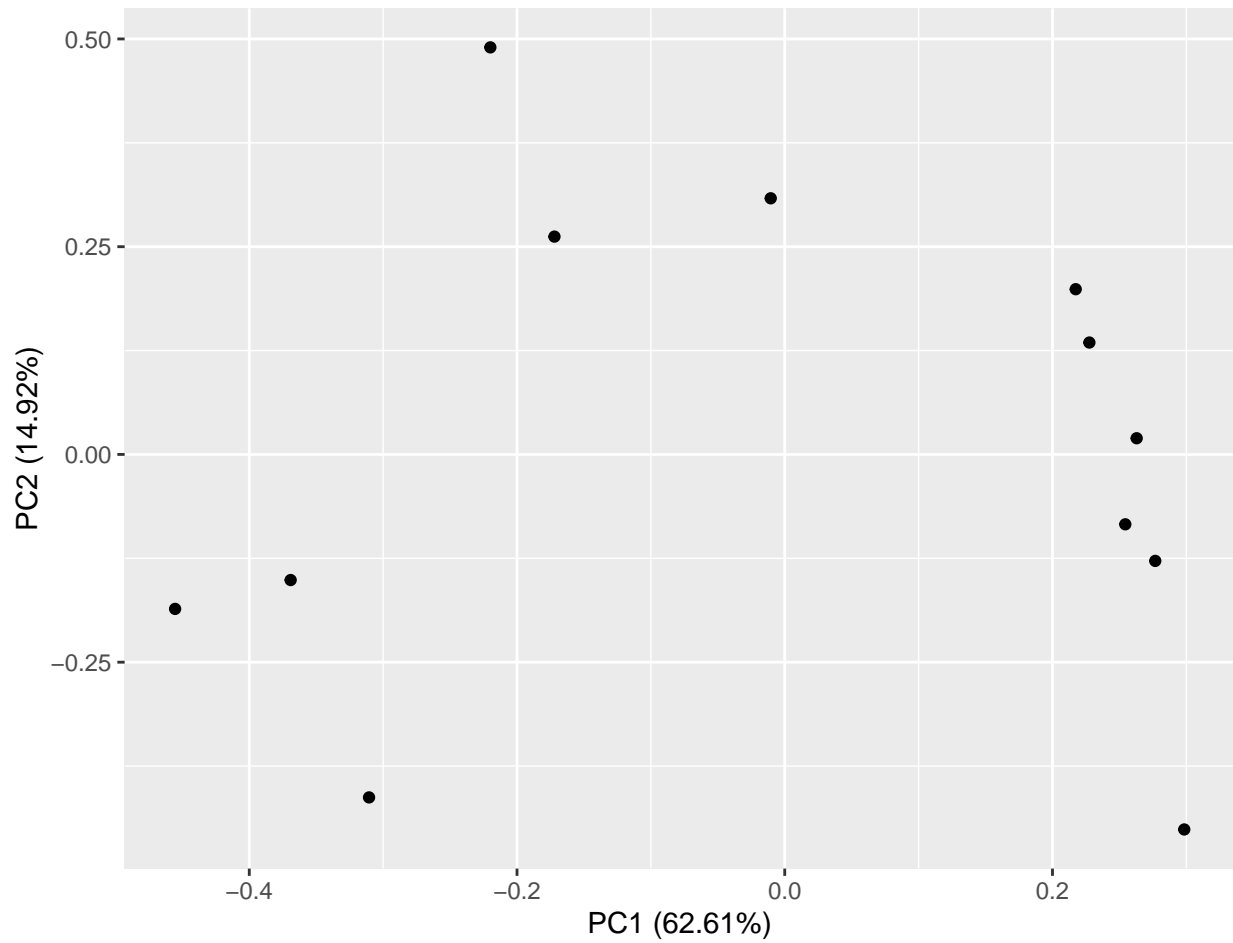

We can use colour and shape to identify the Cell Type and the Status of each sample.

```
autoplot(pcDat,  
  data = sampleinfo,  
  colour="Status",  
  shape="TimePoint",  
  size=5)
```

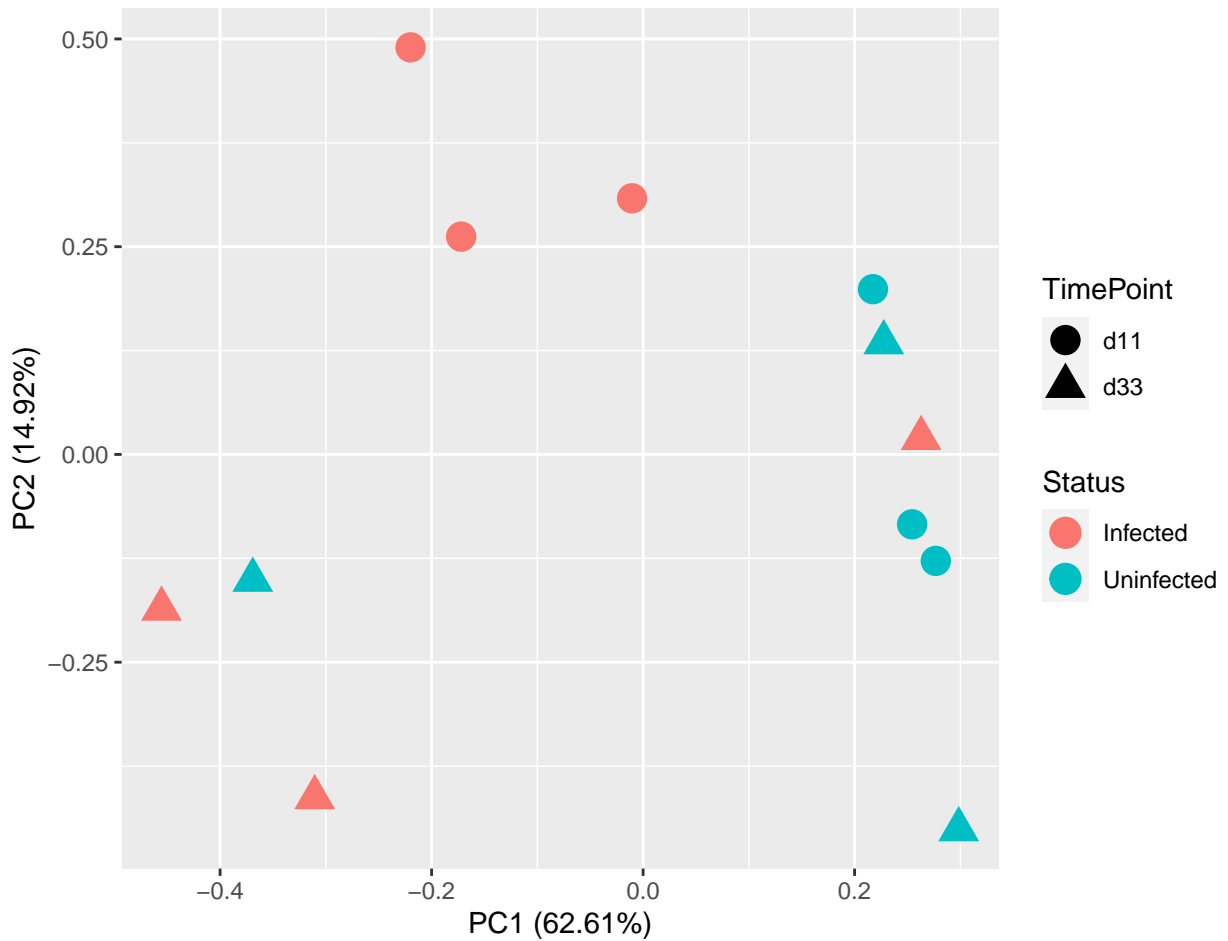


Discussion

What does the PCA plot tell us?

Let's identify these samples. The package `ggrepel` allows us to add text to the plot, but ensures that points that are close together don't have their labels overlapping (they *repel* each other).

```
library(ggrepel)

# setting shape to FALSE causes the plot to default to using the labels instead of points
autoplot(pcDat,
  data = sampleinfo,
  colour="Status",
  shape="TimePoint",
  size=5) +
  geom_text_repel(aes(x=PC1, y=PC2, label=SampleName), box.padding = 0.8)
```

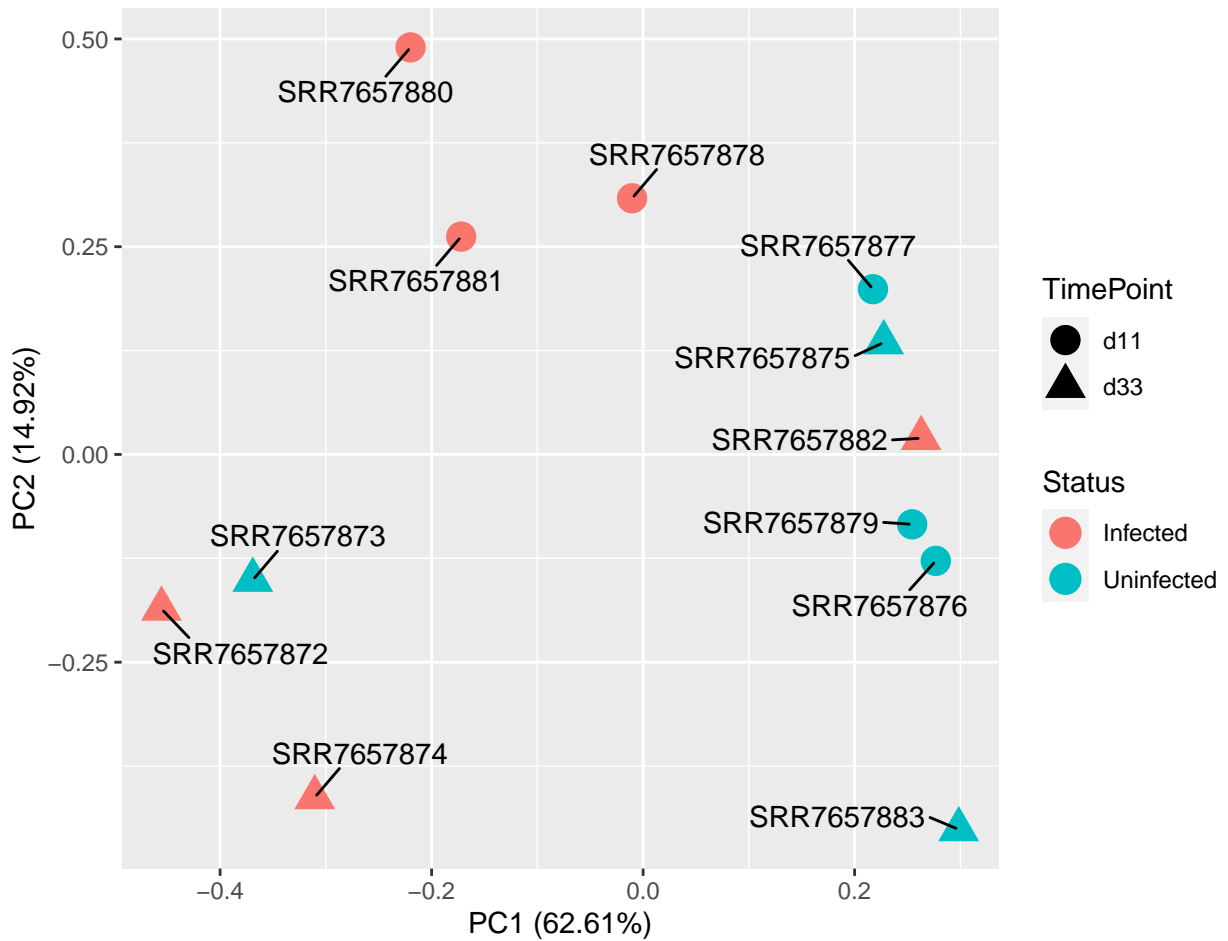

The mislabelled samples are *SRR7657882*, which is labelled as *Test* but should be *Control*, and *SRR7657873*, which is labelled as *Control* but should be *Test*. Let's fix the sample sheet.

We're going to use another `dplyr` command `mutate`.


```
sampleinfo <- mutate(sampleinfo, Status=case_when(
  SampleName=="SRR7657882" ~ "Uninfected",
  SampleName=="SRR7657873" ~ "Infected",
  TRUE ~ Status))
```

...and export it so that we have the correct version for later use.

```
write_tsv(sampleinfo, "results/SampleInfo_Corrected.txt")
```

Let's look at the PCA now.

```
autoplot(pcDat,
  data = sampleinfo,
  colour="Status",
  shape="TimePoint",
  size=5)
```

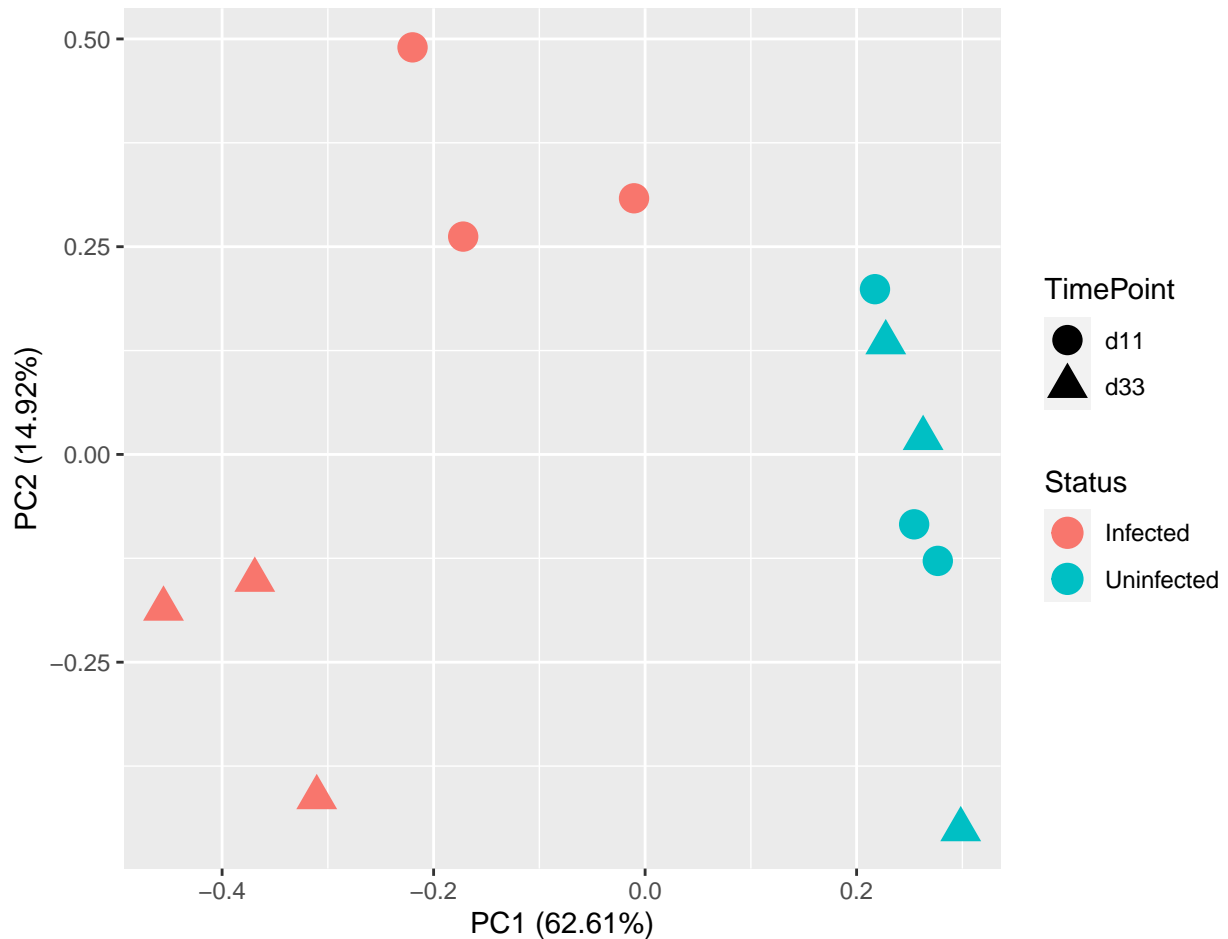

Replicate samples from the same group cluster together in the plot, while samples from different groups form separate clusters. This indicates that the differences between groups are larger than those within groups. The biological signal of interest is stronger than the noise (biological and technical) and can be detected.

Also, there appears to be a strong difference between days 11 and 33 post infection for the test group, but the day 11 and day 33 samples for the controls are mixed together.

Clustering in the PCA plot can be used to motivate changes to the design matrix in light of potential batch effects. For example, imagine that the first replicate of each group was prepared at a separate time from the second replicate. If the PCA plot showed separation of samples by time, it might be worthwhile including time in the downstream analysis to account for the time-based effect.

References

- Hu, Rui-Si, Jun-Jun He, Hany M. Elsheikha, Yang Zou, Muhammad Ehsan, Qiao-Ni Ma, Xing-Quan Zhu, and Wei Cong. 2020. "Transcriptomic Profiling of Mouse Brain During Acute and Chronic Infections by *Toxoplasma Gondii* Oocysts." *Frontiers in Microbiology* 11: 2529. <https://doi.org/10.3389/fmicb.2020.570903>.
- Patro, Duggal, R. 2017. "Salmon Provides Fast and Bias-Aware Quantification of Transcript Expression." *Nature Methods* 14: 417–19. <https://doi.org/10.1038/nmeth.4197>.

- Tang, Yuan, Masaaki Horikoshi, and Wenxuan Li. 2016. “Ggfortify: Unified Interface to Visualize Statistical Result of Popular r Packages.” *The R Journal* 8. <https://journal.r-project.org/>.
- Wickham, Hadley, Romain François, Lionel Henry, and Kirill Müller. 2018. *Dplyr: A Grammar of Data Manipulation*. <https://CRAN.R-project.org/package=dplyr>.